

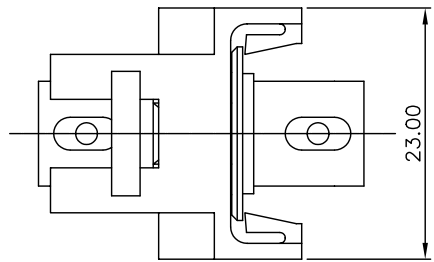
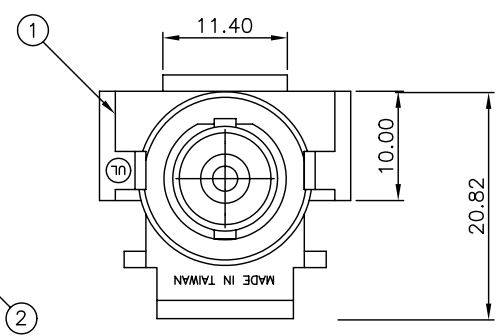


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION, AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION FROM DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	RELEASED.	09/16/2008	E.A.

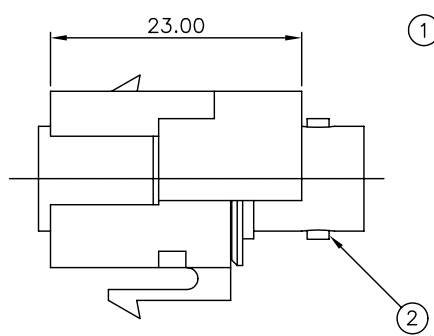

- NOTES:
- DIMENSIONS ARE IN MILLIMETERS.
  - MATERIAL: HOUSING:ABS 94V-0  
F CONNECTOR:BRONZE OR ZINC ALLOY
  - COLOR: HOUSING: E-IVY
  - FINISH: F CONNECTOR: NICKEL PLATING 100u"
  - UNLESS OTHERWISE SPECIFIED TOLERANCE FOLLOWING-HOUSING: (1)TOLERANCE:±0.2mm  
(2)ANGULAR:±5  
F CONNECTOR: (1)TOLERANCE:±0.15mm  
(2)ANGULAR:±0'30"

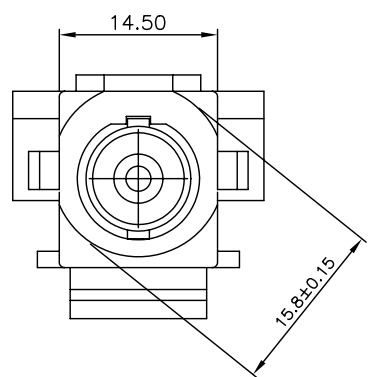

**ELECTRICAL**

Impedance	50 ohm	75 ohm
Frequency Range	0-4GHz	0-1GHz
Working Voltage	500 Volts rms	500 Volts rms
Dielectric Withstanding Voltage	1500 Volts rms	1500 Volts rms
VSWR	1.3 max. 0-4GHz	1.05+0.1f(GHz)DCto1GHz
Contact Resistance	Center contact1.5milliohm Outer contact1.0milliohm	Center contact1.5milliohm Outer contact1.0milliohm
Insulation Resistance	5000 megohms (min)	5000 megohms (min)

②	F CONNECTOR	NICKEL PLATING	1	NL 100u"
①	HOUSING	ABS 94V-0	1	
ITEM	PART NAME	DESCRIPTION	Q'TY	REMARK



e-mail.....sales@dynacomcorp.com  
31082 San Antonio Street  
Hayward, California 94544

Dimensions: mm - DO NOT SCALE DRAWING				
NEXT ASSY-	DRAWN: 10/14/08	CHECKED: E.A.		
TITLE:	<b>BNC COUPLER MODULE</b>	DWG. NO. <b>10600-BNCF-XX</b>	SHEET 1 OF 1	REV. <b>A</b>