

1	2	3	4
ZONE	REV	DESCRIPTION	DATE
-	A	INITIAL RELEASE	07-21-2011
			APPLY.
			E.A.





THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

MATERIAL:
 ADAPTER BODY: ENGINEERING PLASTIC.
 SPRING LEVER : ENGINEERING PLASTIC
 SLEEVE: PHOSPHOR BRONZE; OR
 ZIRCONIA (CERAMIC)
 MOUNT PLATE: STAINLESS STEEL
 DUST CAP: ENGINEERING PLASTIC.
 HOUSING:ABS UL94V0

SPECIFICATION (SM SLEEVE) SPECIFICATION (MM SLEEVE)

INSERTION LOSS(dB) TYP/MAX	0.15/0.3	0.2/0.4
ΔIL (dB)500 MATINGS	0.1	0.1
TEMP RANGE (°C)	-40 TO +85	-40 TO +85
ALIGNMENT SLEEVE		
RETENTION FORCE (gf)	300~600	200~600

INSERTION LOSS(dB) TYP/MAX	0.15/0.3	0.2/0.4
ΔIL (dB)500 MATINGS	0.1	0.1
TEMP RANGE (°C)	-40 TO +85	-40 TO +85
ALIGNMENT SLEEVE		
RETENTION FORCE (gf)	300~600	200~600

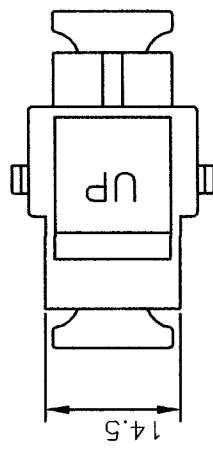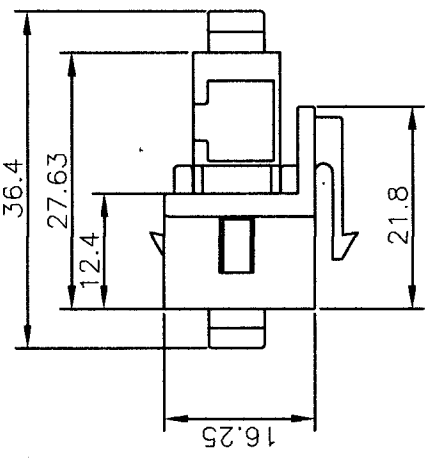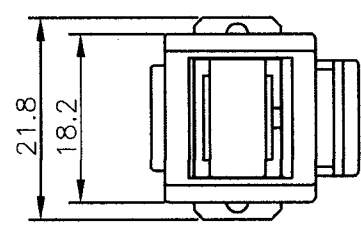

e-mail.....sales@dynamcomcorp.com
 webwww.dynamcomcorp.com

TOLS:			
NEXT ASSY: -	DRAWN: E.A. 07/21/2011	CHECKED: -	
TITLE: SC Coupler Module	DWG. NO. 10600-SC-XX	REV. A	