







1 2

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	03/15/02	E.A.

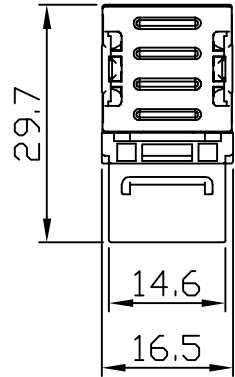

ENVIRONMENTAL CONDITIONS


Temperature Range  
 Storage -40 to +70°C  
 Operation -10 to +60°C  
 Relative Humidity (Operational) : Maximum  
 Noncondensing 93%

ELECTRICAL

Electrical Insulation Resistance : 500 M?  
 min. @ 100V d.c  
 Dielectric Withstanding Voltage : 1000V d.c. or  
 a.c. Peak Contact to Contact @ 60Hz for 1  
 minute

Spring Wire Contact Resistance :  
 20 m? Max.  
 IDC Contact Resistance :  
 2.5 m? Max.

Current Rating : as figure.



MECHANICAL

Total Contact Force : 600 GRAMS for A 6 Wire  
 Leads Minimum  
 Retention : 50N (11 lbf) for 60s±5s  
 Insertion / Extraction Life : 750 Cycles Minimum  
 IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic,  
 UL 94V-0  
 Spring Wire : Phosphor Bronze Alloy Plated With  
 50 micro-inch of Gold Over 40 Min. micro-inch  
 of Nickel



e-mail.....sales@dynacomcorp.com  
 Hayward, California

TOLS. .X=+/- 0.030, .XX=+/- 0.010, .XXX=+/- .005, ANGLES=+/-0.5 DEG.

NEXT ASSY: -	DRAWN: E.A. 03/15/02	CHECKED: Joe Tornello
TITLE: 90 Deg HD Voice Jack RJ11	DWG. NO. 10600H-6-XX	SHEET 1 OF 1 REV. A