
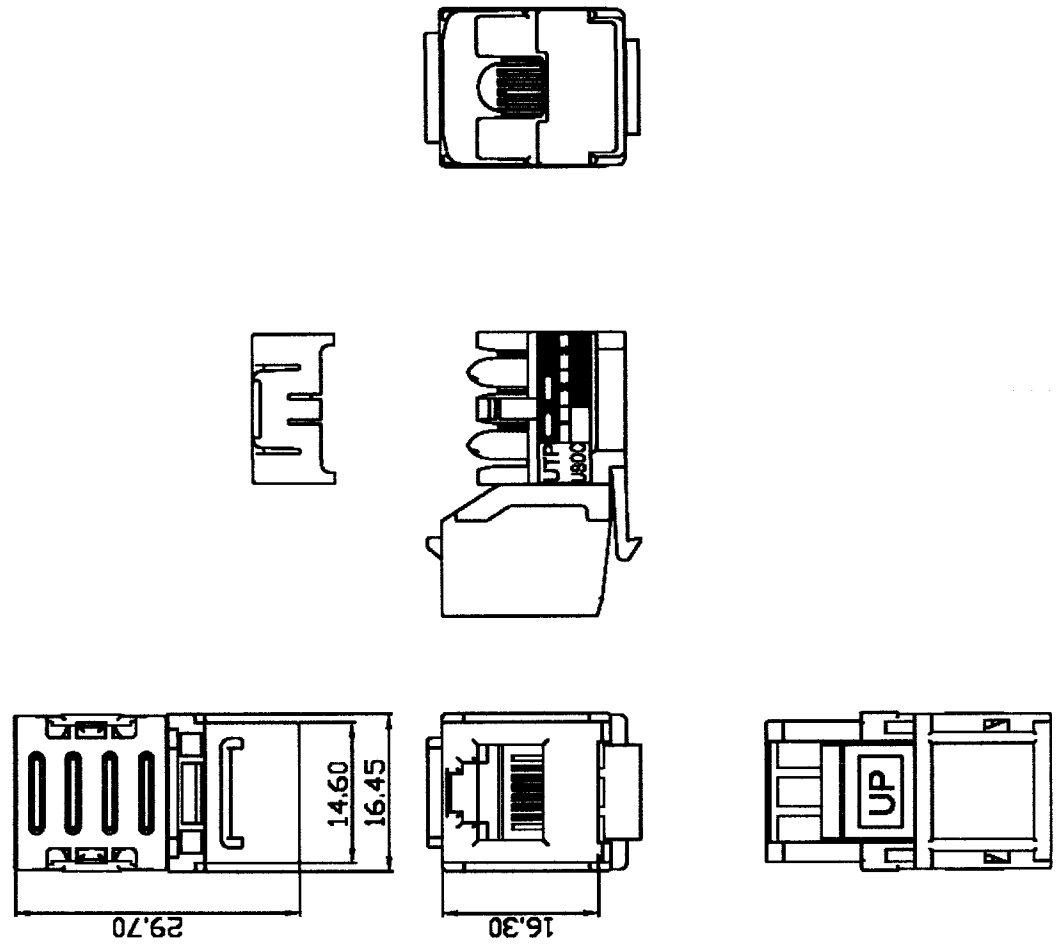


1	2	3	4
ZONE	REV	DESCRIPTION	DATE
-	A	INITIAL RELEASE	05/03/2011
			APPV. E.A.

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ENVIRONMENTAL CONDITIONS
 Temperature Range -40 to +70°C
 Storage -10 to +60°C
 Operation -10 to +60°C
 Relative Humidity (Operational) : Maximum Noncondensing 93%
ELECTRICAL
 Electrical Insulation Resistance : 500 MΩ min. @ 100V d.c.
 Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute
 Spring Wire Contact Resistance : 20 mΩ Max.
 IDC Contact Resistance : 2.5 mΩ Max.
 Current Rating : as figure.
MECHANICAL
 Total Contact Force : 600 GRAMS for A & Wire Leads Minimum
 Retention : 50N (11 lbf) for 60s±5s
 Insertion / Extraction Life : 750 Cycles Minimum
 IDC Wire Gauge : 22 ~ 24 AWG
PHYSICAL
 Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
 Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold Over 40 Min. micro-inch of Nickel



ALL DIMENSIONS ARE IN MM.

email...sales@dynamocorp.com
 web....www.dynamocorp.com

email...sales@dynamocorp.com
 web....www.dynamocorp.com

NEXT ASSY: - DRAWN: E.A. 05/03/2011 CHECKED: -

TITLE: Cat3 Voice Kwik Jack 6P6C

REV. A

