


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	5/1/2021	E.A.
-	B			
-	C			
-	D			

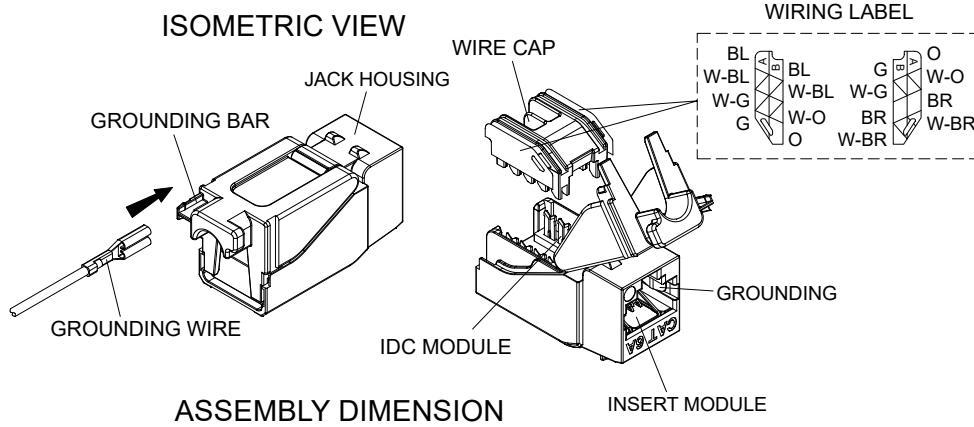


TRANSMISSION PERFORMANCE
Meet all requirements specified in connecting hardware requirement of TIA-568-C.2 Cat.6A

ELECTRICAL
Electrical Insulation Resistance : 500 MΩ min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute, 1500V d.c. or a.c. Peak; all contacts connected together to shield @ 60Hz for 1 minute.

MECHANICAL
Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : Re-usable IDC's can be terminated 20 times with wires from 24 AWG through 22 AWG.

PHYSICAL
Housing : Zinc-alloy fully shielded
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy

ASSEMBLY DIMENSION

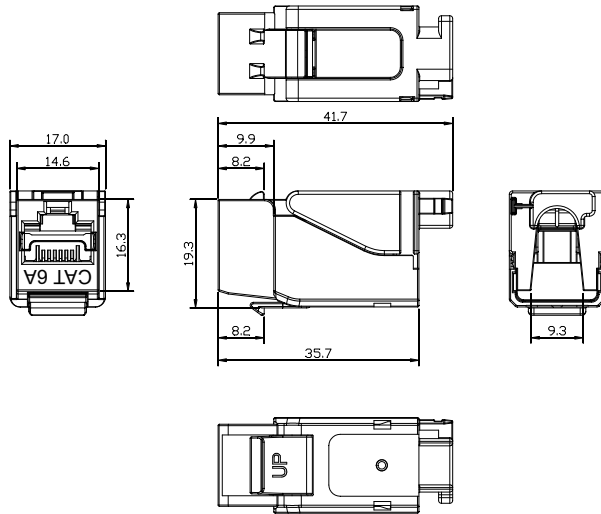

COMPONENTS		
ITEM	PART NAME	Q'TY
6	WIRING LABEL	2
5	GROUNDING	1
4	IDC MODULE	1
3	WIRE CAP	1
2	INSERT MODULE	1
1	JACK HOUSING	1



e-mail...sales@dynacomcorp.com
www.dynacomcorp.com

DIMENSIONS: MM

NEXT ASSY: -	DRAWN: E.A.	CHECKED: A.L.
TITLE CAT6A HD SHIELD JACK, TOOL-LESS		DWG. NO. SHEET 1 OF 1 10606A-FTP
		REV. A