
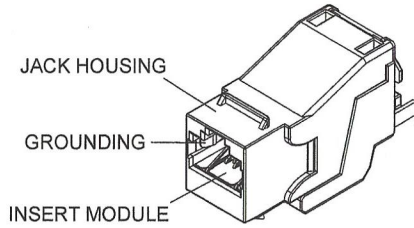



1 THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	07/29/2015	E.A.

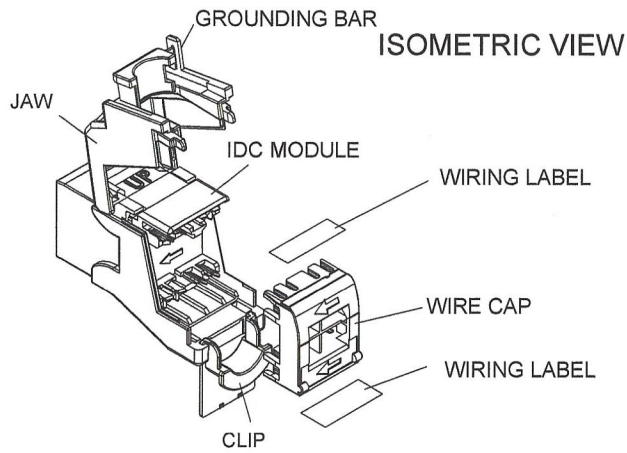

COMPONENTS		
ITEM	PART NAME	QTY
8	WIRING LABEL	2
7	CLIP	1
6	JAW	1
5	WIRE CAP	1
4	IDC MODULE	1
3	INSERT MODULE	1
2	GROUNDING	1
1	JACK HOUSING	1

ASSEMBLY DIMENSION

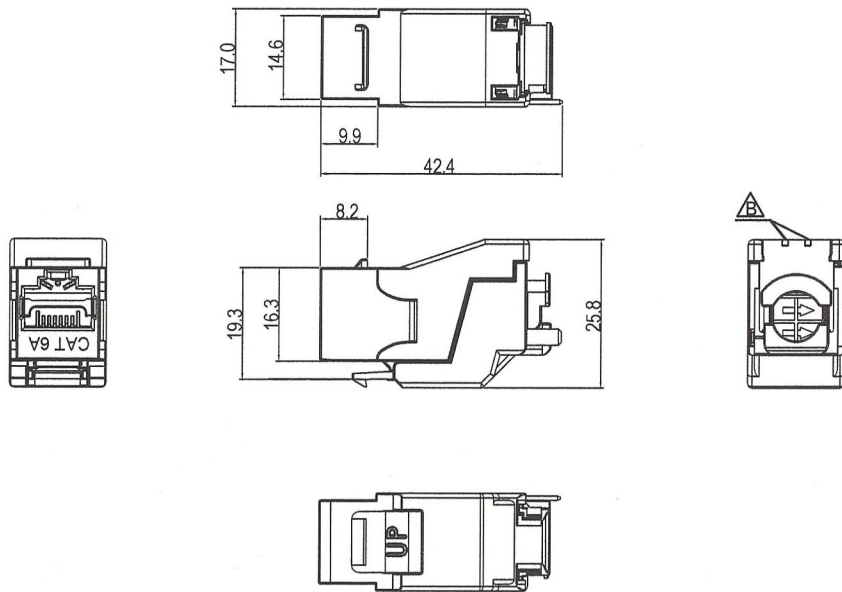

TRANSMISSION PERFORMANCE
Meets all requirements specified in connecting hardware requirements of:
ANSI/TIA-568-C.2, Cat.6A

ELECTRICAL

Electrical Insulation Resistance : 500 M min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute, 1500V d.c. or a.c. Peak Contact to Panel @ 60Hz for 1 minute

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL

Housing : Zinc-alloy fully shielded
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy



e-mail....sales@dynacomcorp.com
www.dynacomcorp.com

TOLS ~ 20MM ± 0.2MM, OVER 20MM TO 60MM ± 0.4MM, OVER 60MM ± 0.8MM. ANGLES ± 1 DEG		
NEXT ASSY: -	DRAWN: E.A. 07/29/2015	CHECKED: EA
TITLE	DWG. NO.	SHEET 1 OF 1
SHIELDED DATA JACK	10606AS	REV. A