THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

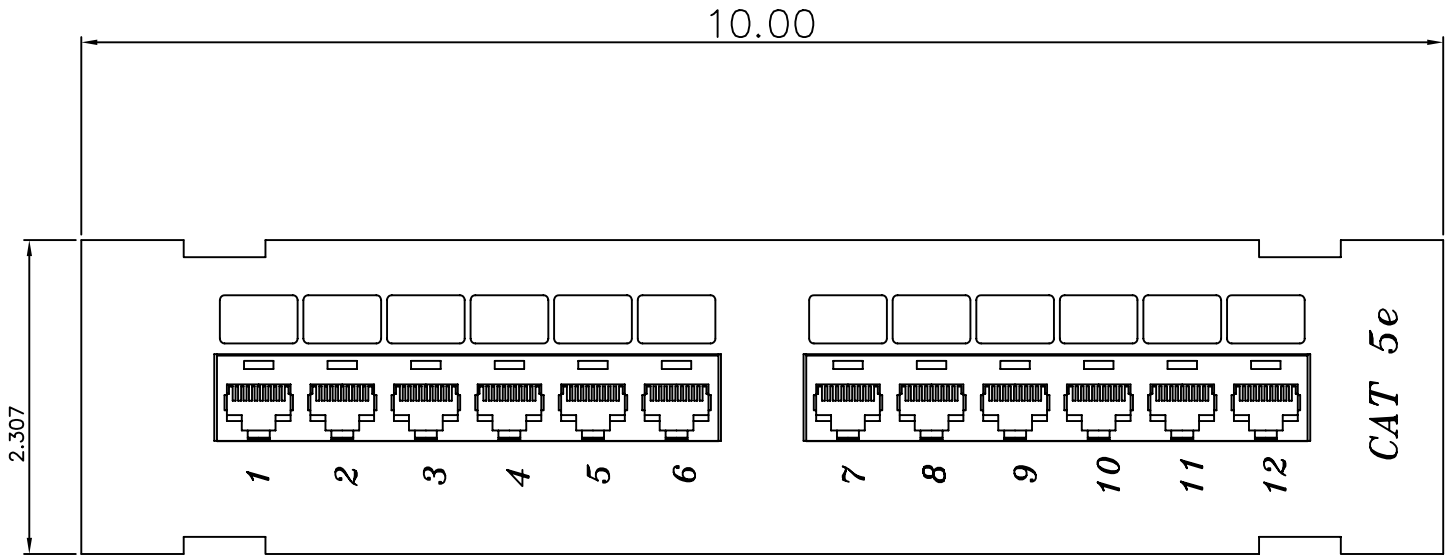

UNLESS OTHERWISE SPECIFIED: TOLERANCES	PROJECT ID 2013-12DC5E	Dynacom
DECIMAL ~20 ±0.1mm; OVER 20~60 ±0.15mm; OVER 60~ ±0.2mm; ANGULAR ±0°50'	FILE	TITLE 12-PORT CAT5 PATCH PANEL PLATE
MATERIAL	DRAWN	
SURFACE	CHECK	SIZE / DRAWING NUMBER / PART NUMBER / REV
FINISH	APPROVED	SCALE / UNIT / SHEET

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED

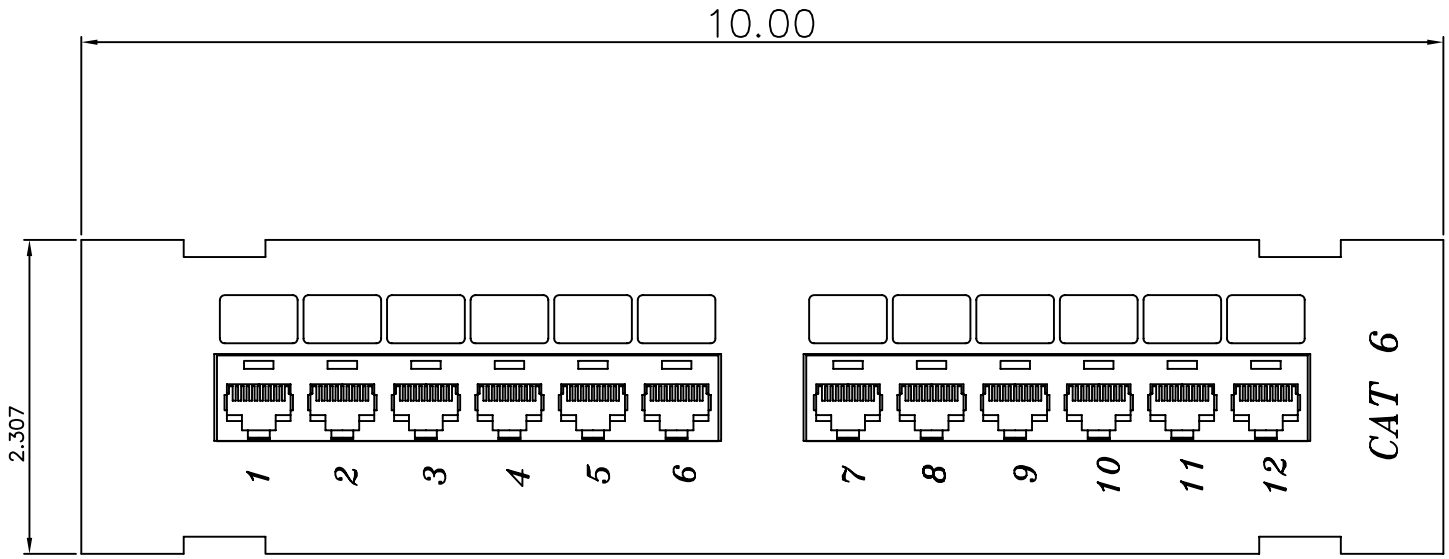

UNLESS OTHERWISE SPECIFIED: TOLERANCES DECIMAL ~20 ±0.1mm OVER 20~60 ±0.15mm OVER 60~ ±0.2mm ANGULAR ±0°50' MATERIAL	PROJECT ID 2013-12DC6 FILE DRAWN	Dynacom TITLE 12-PORT CAT6 PATCH PANEL
SURFACE	CHECK	SIZE / DRAWING NUMBER / PART NUMBER / REV
FINISH	APPROVED	SCALE / UNIT / SHEET

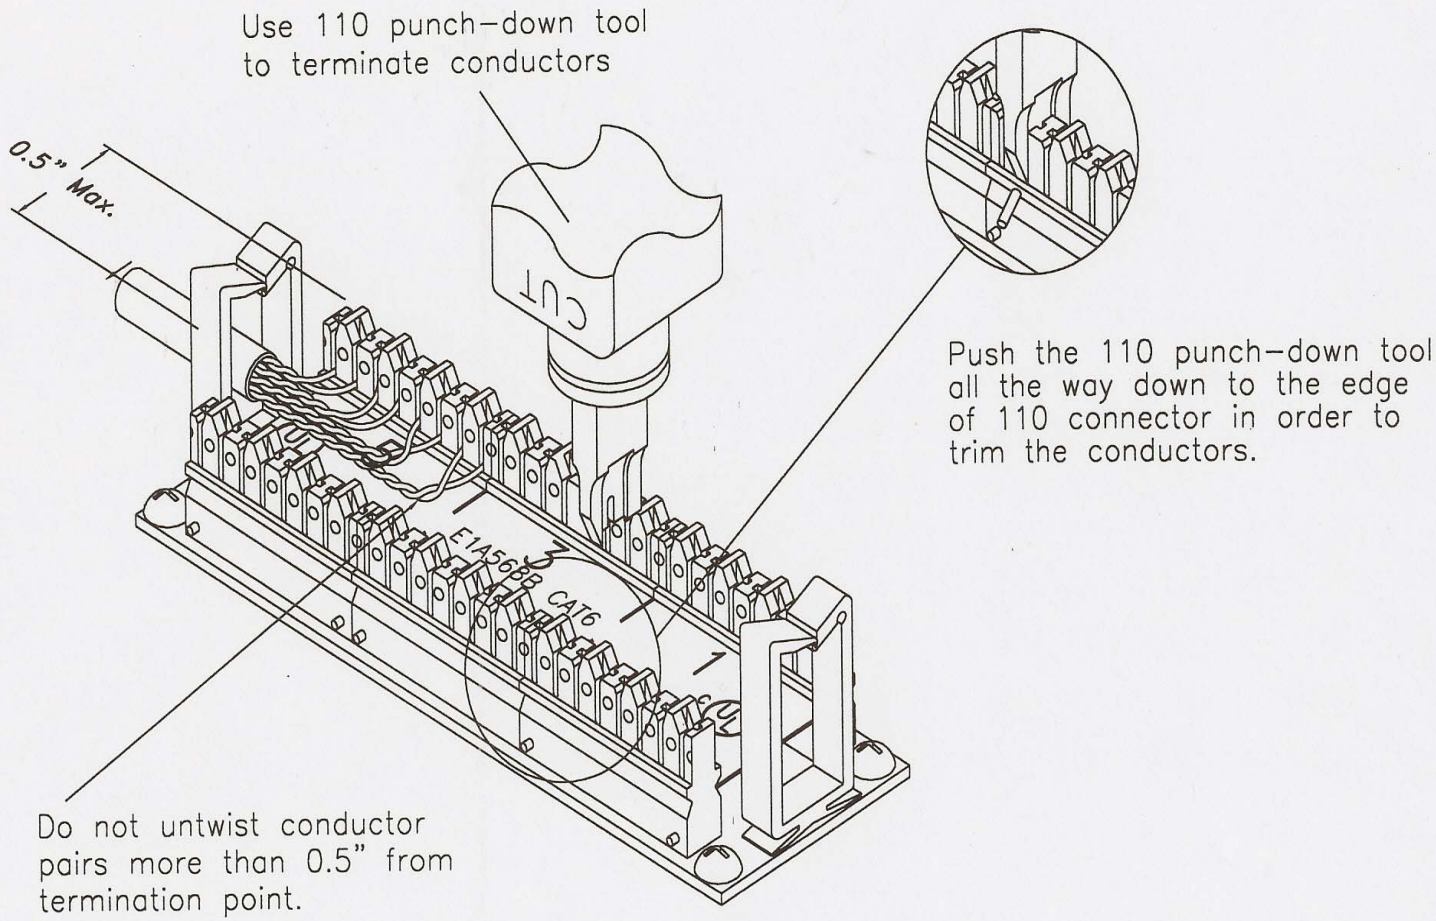
Use 110 punch-down tool
to terminate conductors
0.5" Max.
CUT
Push the 110 punch-down tool
all the way down to the edge
of 110 connector in order to
trim the conductors.
EIA568B CAT6
Do not untwist conductor
pairs more than 0.5" from
termination point.