



THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	09/09/2014	E.A.

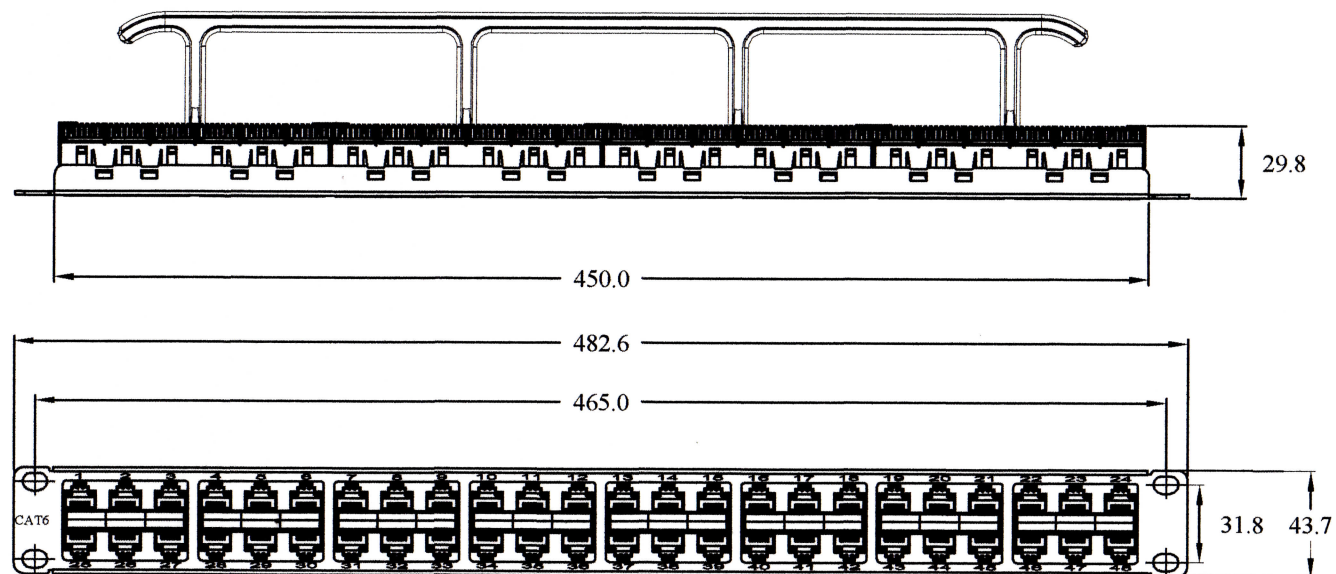

TRANSMISSION PERFORMANCE
Meets TIA/EIA-568-B.2-1 Cat.6 Connecting Hardware requirements.

ELECTRICAL
Electrical Insulation Resistance : 500 MΩ min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute

MECHANICAL
Insertion / Extraction Life : 750 Cycles
Minimum
IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL
Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire : Phosphor Bronze Alloy
Plated With 50 micro-inch of Gold Over 70~100 micro-inch of Nickel
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy

Dynacom
Network Products

e-mail.....sales@dynacomcorp.com

webwww.dynacomcorp.com

DIMENSIONS ARE SHOWN IN MILIMETERS.

NEXT ASSY: -	DRAWN: E.A. 09/09/14	CHECKED: -
Ultra-High Density Cat6 Patch Panel		DWG. NO. 2013-48C61U
		REV. A