


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	08/09/16	E.A.

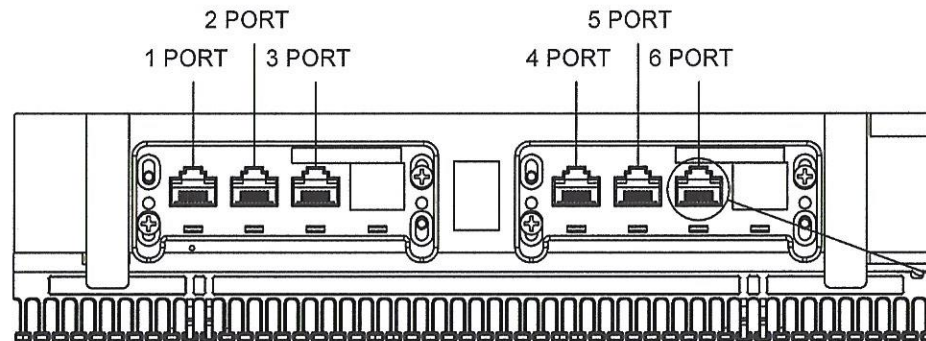

ELECTRICAL




Electrical Insulation Resistance : 500 M Ω min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak; one contact to all other contacts connected together @ 60Hz for 1 minute.

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 26 AWG Solid Insulated Cable

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Brass Plated With 100 micro-inch 100% Sn Alloy

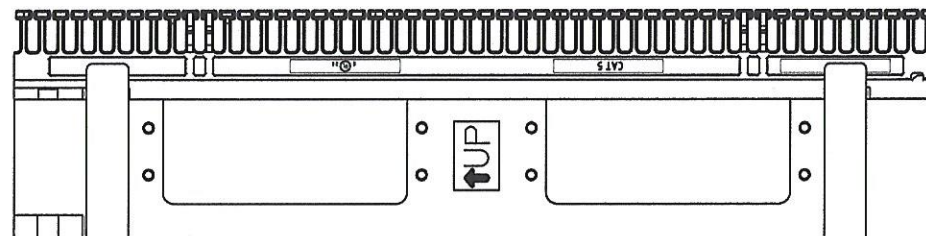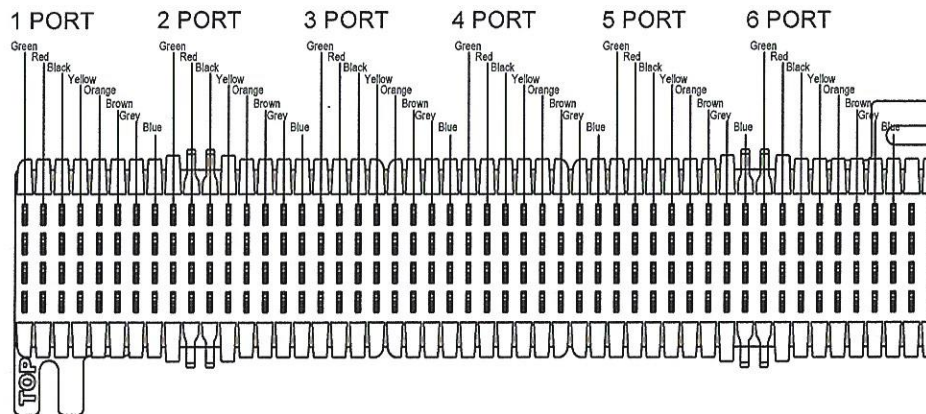


e-mail....sales@dynacomcorp.com
www.dynacomcorp.com

TOLS ~ 20MM $\pm$ 0.2MM, OVER 20MM TO 60MM $\pm$ 0.4MM, OVER 60MM $\pm$ 0.8MM. ANGLES $\pm$ 1 DEG			
NEXT ASSY: -	DRAWN: E.A. 08/09/16	CHECKED: EA	
TITLE	50-Pair 66 Style Wiring Block w/USOC Voice Jacks Six 8P8C	DWG. NO.	REV.
		66BM06-4	A

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	08/14/16	E.A.

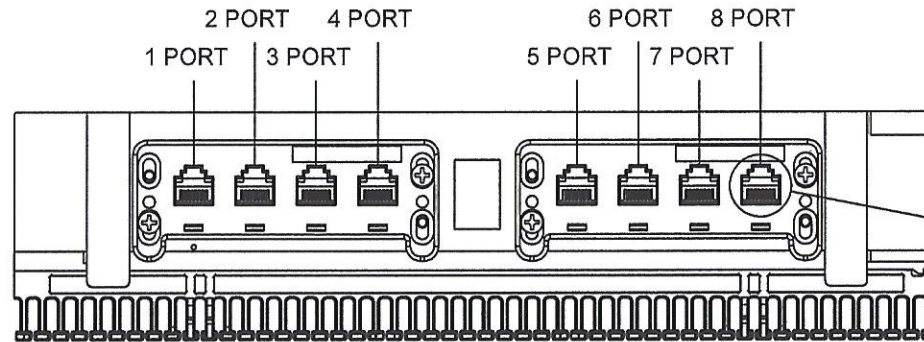

ELECTRICAL




Electrical Insulation Resistance : 500 M Ω min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak; one contact to all other contacts connected together @ 60Hz for 1 minute.

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 26 AWG Solid Insulated Cable

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Brass Plated With 100 micro-inch 100% Sn Alloy

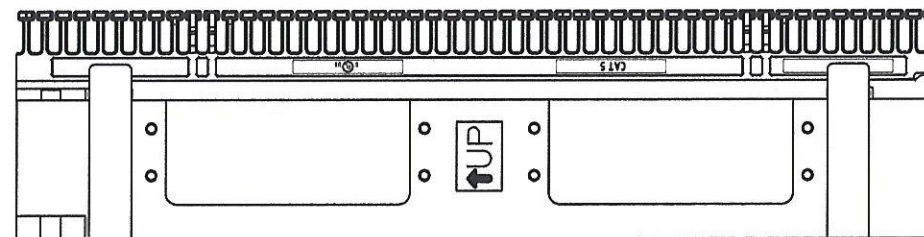

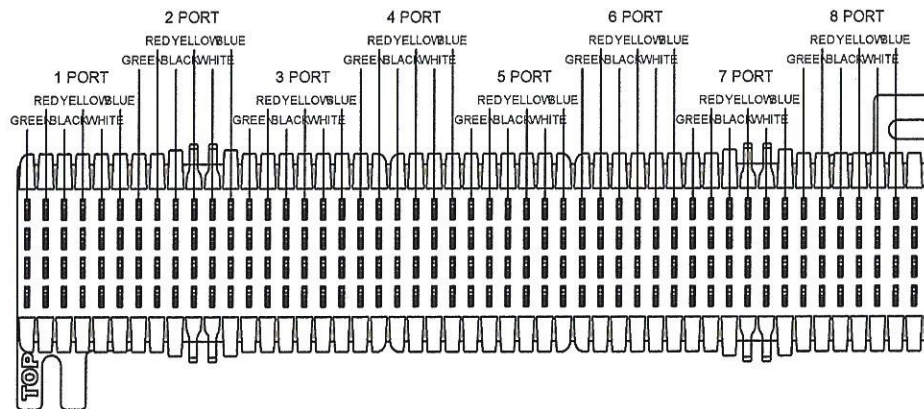


e-mail....sales@dynacomcorp.com
www.dynacomcorp.com

TOLS ~ 20MM $\pm$ 0.2MM, OVER 20MM TO 60MM $\pm$ 0.4MM, OVER 60MM $\pm$ 0.8MM. ANGLES $\pm$ 1 DEG				
NEXT ASSY: -		DRAWN: E.A. 08/04/16		CHECKED: EA
TITLE		50-Pair 66 Style Wiring Block w/USOC Voice Jacks Eight 6P6C		DWG. NO. SHEET 1 OF 1
		66BM08-3		REV. A

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	08/14/16	E.A.

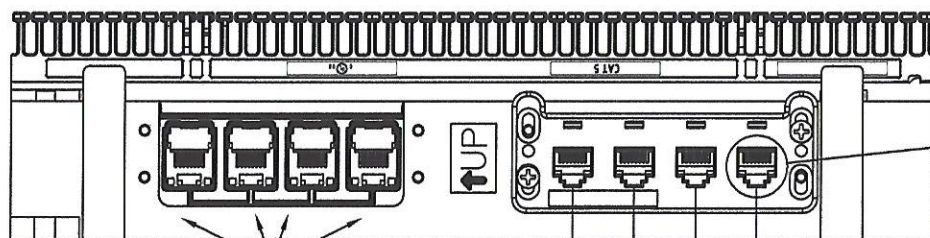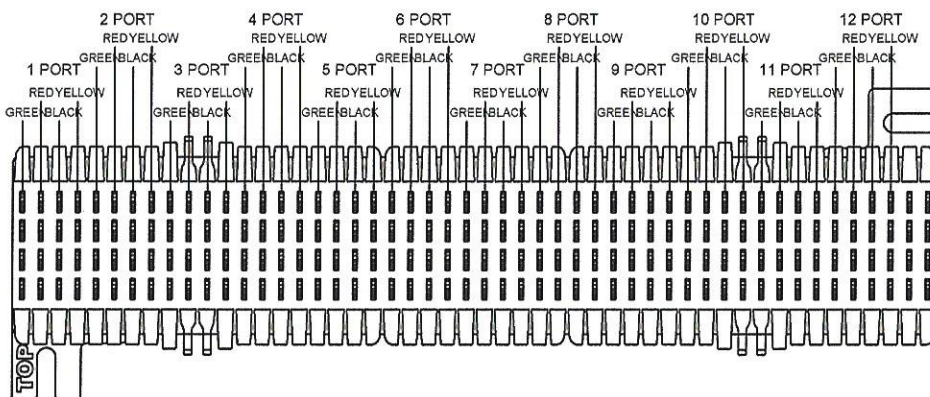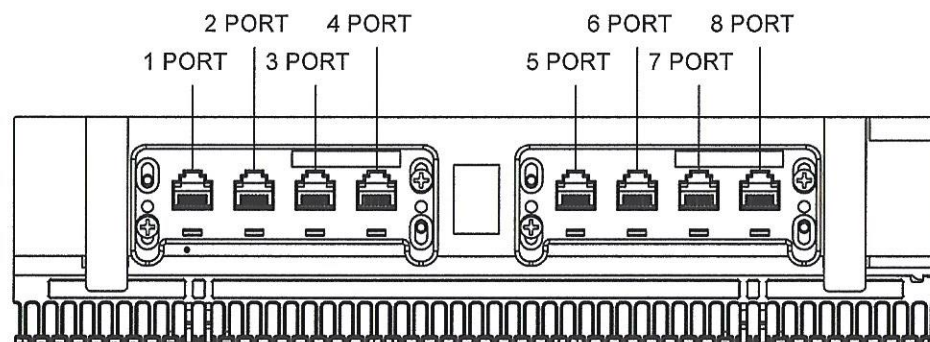

THESE 4 ITEMS SHOWN BUT NOT SUPPLIED WITH 66BM12-2 PURCHASE.

9 PORT 11 PORT
10 PORT 12 PORT

ELECTRICAL



Electrical Insulation Resistance : 500 M Ω min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak; one contact to all other contacts connected together @ 60Hz for 1 minute.

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 26 AWG Solid Insulated Cable

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Brass Plated With 100 micro-inch 100% Sn Alloy



e-mail...sales@dynacomcorp.com
www.dynacomcorp.com

TOLS ~ 20MM $\pm$ 0.2MM, OVER 20MM TO 60MM $\pm$ 0.4MM, OVER 60MM $\pm$ 0.8MM. ANGLES $\pm$ 1 DEG

NEXT ASSY: -

DRAWN: E.A. 08/04/16

CHECKED: EA

TITLE

50-Pair 66 Style Wiring Block w/USOC
Voice Jacks Twelve 6P4C

DWG. NO.

66BM12-2

SHEET 1 OF 1

REV.
A