


1 2

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	05/03/2016	E.A.

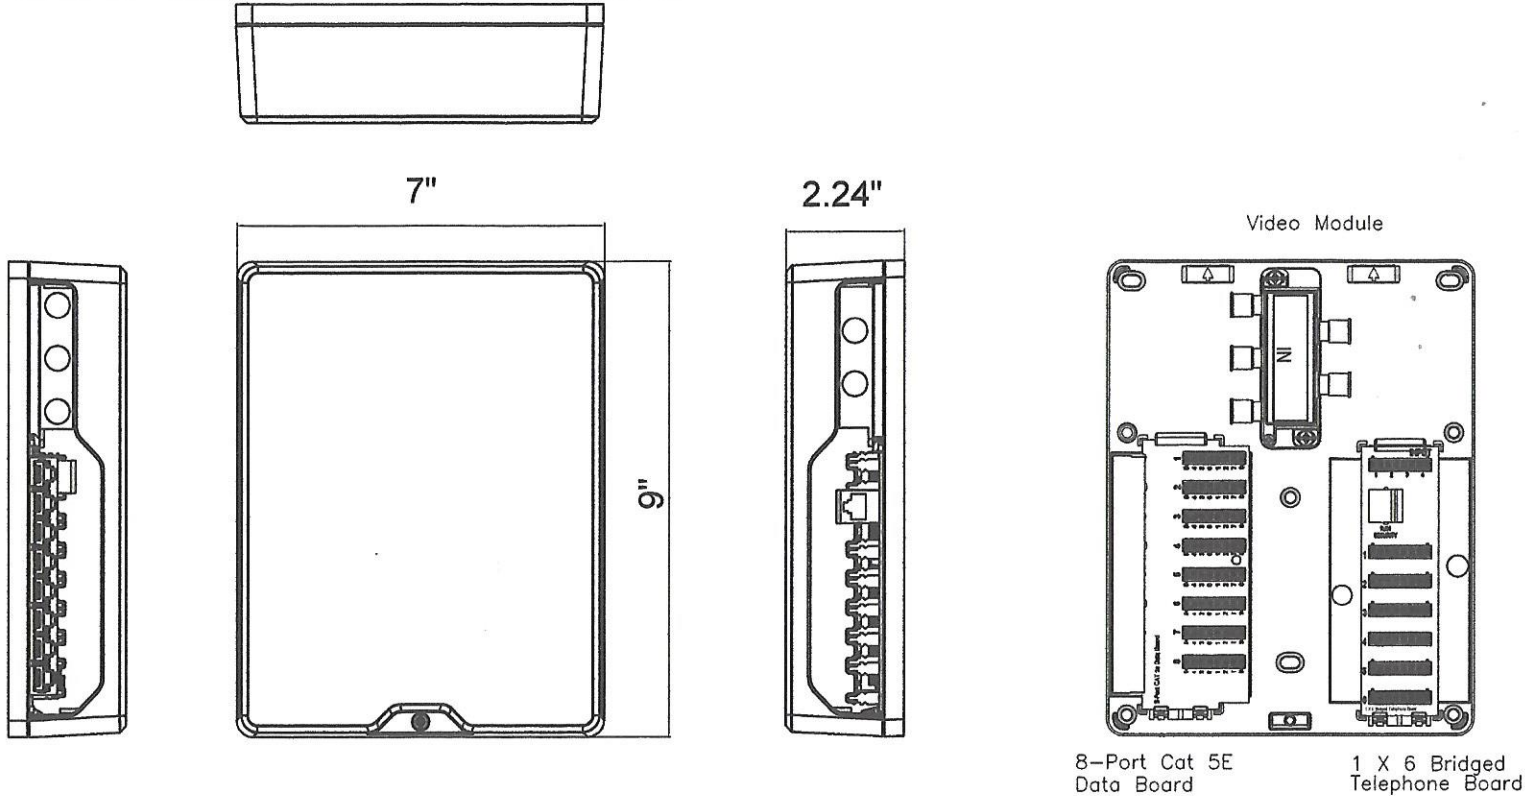

**TRANSMISSION PERFORMANCE**  
Meet all requirements specified in connecting hardware requirement of:  
ANSI/TIA-568-C.2, Category 5e.

**ELECTRICAL**  
Electrical Insulation Resistance : 500 Mohms min. @ 100V d.c  
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute.

**MECHANICAL**  
Insertion / Extraction Life : 750 Cycles Minimum  
IDC Wire Gauge : 22 ~ 24 AWG

**PHYSICAL**  
Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0  
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold  
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy








e-mail....sales@dynacomcorp.com  
www.dynacomcorp.com

INCHES:			
NEXT ASSY: -	DRAWN: E.A. 05/03/2016	CHECKED: EA	
TITLE	DWG. NO.	SHEET 1 OF 1	REV.
Mini MDU w/Modules Cat 5E	860-PA-5E		A

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	12/23/2015	E.A.

NOTES:  
1. ACCESSORY MODULES NOT SOLD SEPARATELY.

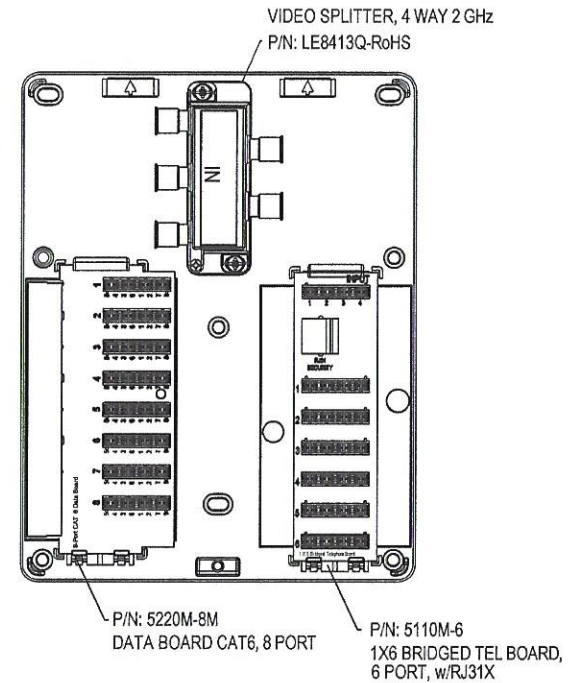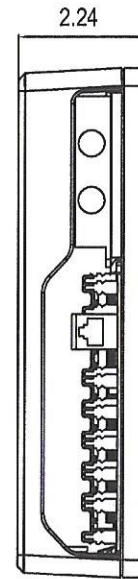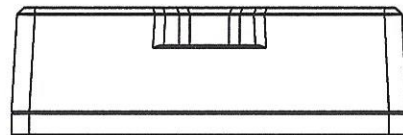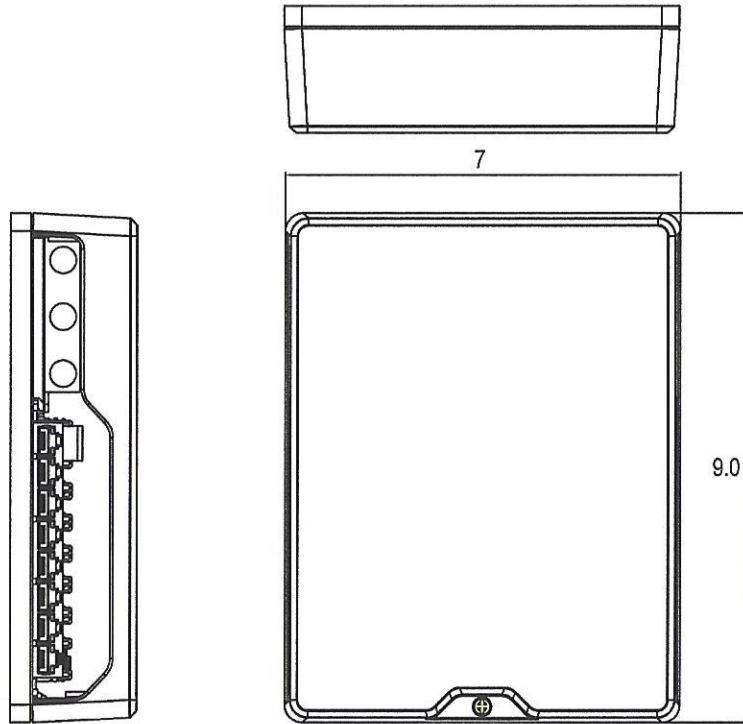

**TRANSMISSION PERFORMANCE**  
Meets all requirements specified in channel requirement of:  
ANSI/TIA-568-C.2, Category 6.

**ELECTRICAL**  
Electrical Insulation Resistance : 500 M $\Omega$  min. @ 100V d.c  
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute.

**MECHANICAL**  
Insertion / Extraction Life : 750 Cycles Minimum  
IDC Wire Gauge : 22 ~ 24 AWG

**PHYSICAL**  
Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0  
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold  
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy



e-mail....sales@dynacomcorp.com  
www.dynacomcorp.com

TOLS: Inches

NEXT ASSY: -

DRAWN: EA 12/23/2015

CHECKED: EA

TITLE

Mini MDU with Modules, Cat6

DWG. NO.

860-PA-6

SHEET 1 OF 1

REV.

A