
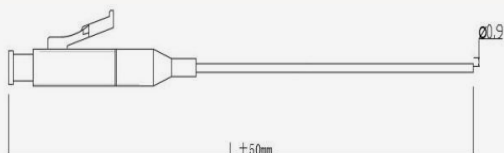




910P series Fiber Optic Pigtail

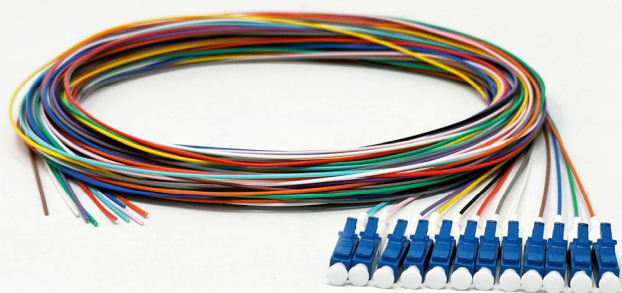

Dynacom fiber optic pigtails utilize premium Corning fiber and high-class Zirconia ferrules for exceptional performance and reliability. All fibers are inspected to ensure stringent quality control. Available in various fiber modes (OS2, OM3, OM4) and customizable options, including connector types and cable lengths, Dynacom pigtails provide reliable and efficient connectivity for demanding fiber optic network applications.

Features:

- Low insertion loss and high return loss, ensuring optimal signal transmission.
- Bend insensitive, exceeds ITU-T G.657.A1*
- Environment Friendly Packaging
- 100% tested



Specification:

Glass Fiber	Corning SMF28 Ultra/ ClearCurve
Fiber Grade	OS2: G.657.A1 OM3:IEC 60793-2-10
Cable Type	900 µm Tight-Buffered
Buffer Material	PVC
Color coded	Yes
Connector Color	OS2 APC: Green; OS2 UPC: Blue; OM3: Gray
Ferrule material	Ceramic zirconia
Length	Multi fibers: 3 meters Single fiber: 1 meter
Operating Temperature	-4 – 158 degrees Fahrenheit
Minimum Ben Radius	7.5 - 10 mm
Interchangeability	1,000 Times
Insertion loss	MM≤0.3dB, SM≤0.2dB
Return Loss	UPC≥ 50dB; APC≥60dB

Options	(Accept Customize Order)
Fiber Strand	1-Fiber, 6-Fiber, 12-Fiber
Mode	OS2, OM3, OM4(optional)
Connector	▪ SC APC ▪ SC UPC ▪ LC APC ▪ LC UPC

910PC-06LC2	Pigtail 900um, 6F, OS2, LC, 3m
910PC-06LC2-GN	Pigtail 900um, 6F, OS2, LC APC, 3m
910PC-06LC3	Pigtail 900um, 6F, OM3, LC, 3m
910PC-06SC2	Pigtail 900um, 6F, OS2, SC, 3m
910PC-06SC2-GN	Pigtail 900um, 6F, OS2, SC APC, 3m
910PC-12LC2	Pigtail 900um, 12F, OS2, LC, 3m
910PC-12LC2-GN	Pigtail 900um, 12F, OS2, LC APC, 3m
910PC-12LC3	Pigtail 900um, 12F, OM3, LC, 3m
910PC-12SC2	Pigtail 900um, 12F, OS2, SC, 3m
910PC-12SC2-GN	Pigtail 900um, 12F, OS2, SC APC, 3m
910PS-01LC2	Pigtail 900um, 1F, OS2, LC, 1m
910PS-01LC3	Pigtail 900um, 1F, OM3, LC, 1m
910PS-01SC2	Pigtail 900um, 1F, OS2, SC, 1m
910PS-01SC2-GN	Pigtail 900um, 1F, OS2, SC APC, 1m

* Single Mode Fiber